


COMPACTION TEST REPORT

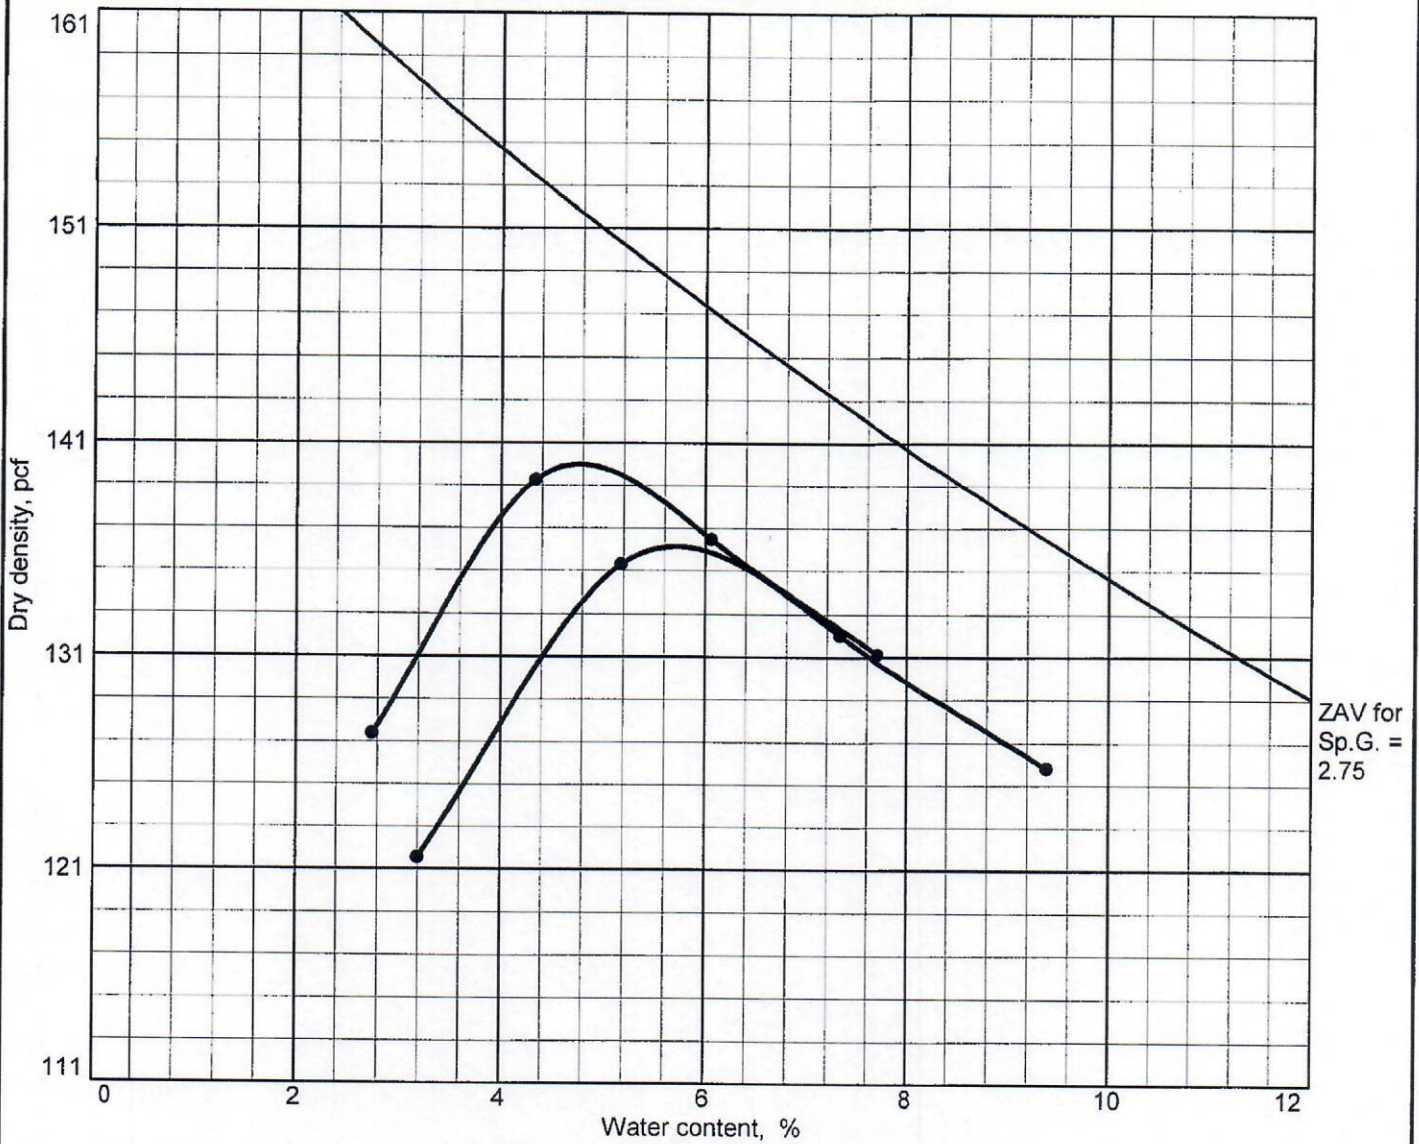

ZAV for
Sp.G. =
2.75

Test specification: ASTM D 1557-12 Method C Modified
 Oversize correction applied to each point

Elev/ Depth	Classification		Nat. Moist.	Sp.G.	LL	PI	% > 3/4 in.	% < No.200
	USCS	AASHTO						
				2.75			19.9	4.0

ROCK CORRECTED TEST RESULTS	UNCORRECTED	MATERIAL DESCRIPTION
Maximum dry density = 140.0 pcf	136.1 pcf	NYSDOT 1 1/4" Minus Crusher Run
Optimum moisture = 4.8 %	5.7 %	

Project No. CT-19-013 **Client:** O'Tooles Sand & Gravel
Project: Material Testing

● **Source:** O'Tooles Pit **Sample No.:** 107

Remarks:
 Date Tested: 2-14-19